

ST. CLAIR COUNTY, MICHIGAN OFFICIAL GOVERNMENT CORNER



LAND CORNER RECORDATION CERTIFICATE Filing Requirement of Act 74, Mich. P.A. 1970

| | | | |
|---------------------------------------|-------------------------|---------------|--|
| | Located In: | Corner Code # | |
| | City of Marysville | | |
| 1. Public Land Survey | T <u>6</u> R <u>17</u> | <u>A-12</u> | |
| | T _____ R _____ | _____ | |
| | T _____ R _____ | _____ | |
| | T _____ R _____ | _____ | |
| 2. Property Controlling in Section | S _____ T _____ R _____ | _____ | |
| | S _____ T _____ R _____ | _____ | |
| 3. Miscellaneous Property in Sec. | S _____ T _____ R _____ | _____ | |
| | S _____ T _____ R _____ | _____ | |
| 4. Lot No. _____, Recorded Plat _____ | | | |
| 5. Private Claims _____ | | | |

RECEIVED
 MARYSVILLE DUNN
 1996 JUL 31 AM 8:30
 REGISTER OF DEEDS
 ST. CLAIR COUNTY
 Register of Deeds Stamp & File Number

I, John C. Niederhauser, in a field survey on June 26, 1995, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

| | A | B | C | D | E | F | G | H | I | J | K | L | M |
|----|----|----|----|----|----|----|---|---|---|---|---|---|---|
| 2 | 6 | 5 | 4 | 3 | 2 | 1 | | | | | | | |
| 3 | | | | | | | | | | | | | |
| 4 | 7 | 8 | 9 | 10 | 11 | 12 | | | | | | | |
| 5 | | | | | | | | | | | | | |
| 6 | 18 | 17 | 16 | 15 | 14 | 13 | | | | | | | |
| 7 | | | | | | | | | | | | | |
| 8 | 19 | 20 | 21 | 22 | 23 | 24 | | | | | | | |
| 9 | | | | | | | | | | | | | |
| 10 | 30 | 29 | 28 | 27 | 26 | 25 | | | | | | | |
| 11 | | | | | | | | | | | | | |
| 12 | 31 | 32 | 33 | 34 | 35 | 36 | | | | | | | |
| 13 | | | | | | | | | | | | | |

NOTE: Not more than 1 corner, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

Original corner set on a 5" diameter Sugar Maple tree by William Preston in 1817. Only witnesses listed on Old County Surveyor's Record for St. Clair County. Corner recovered and recorded by C. Alloway Liber 2, Page 425; by C. Alloway Liber 3 page 6 for corner M-12 of T6N - R16E which is common, and by D. Little Liber 6, Page 63 for corner M-12 of T6N - R16E which is also common.

SURVEY &
 MONUMENTATION
 JUL 14 1997
 COMMISSION


B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

Found 1 1/4" iron pipe in monument box on centerline of existing Range Road pavement. Verified corner from previously recorded witnesses. Referenced subdivision plat Liber 31, Page 1 and M.D.O.T. R.O.W. book for St. Clair County, page 17. Also referenced surveys by V.T.A. dated 11-23-73 and by G. James dated 11-18-89. This corner is common to corner M-12 of T6N - R16E and can be referenced for additional information.

PA 345-1990
 PEER COMMITTEE
 APPROVED 7-21-95
Daniel Johnson

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

Set a 2" dia. aluminum cap with magnet, inscribed "St. Clair County Official Corner" on a 1 1/4" iron pipe in monument box on centerline of existing Range Road pavement. Located on the true Township line and is common to corner M-12 of T6N - R16E. S 80°E 63.13' to set P.K. nail with county remon tag in W. side of 6" Maple tree. S 90°W 49.88' to set P.K. nail with county remon tag in S. side of a power pole. N 60°E 73.28' to set P.K. nail with county remon tag in N. side of 6" Maple tree. S 30°E 98.70' to set P.K. nail with county remon tag in S.W. side of 6" tree. NORTH 2703.94' to corner A-11 of T6N - R17E. SOUTH 2694.98' to corner A-13 of T6N - R17E. SOUTH 1206.63' to found P.K. nail at centerline of Gratiot Blvd.

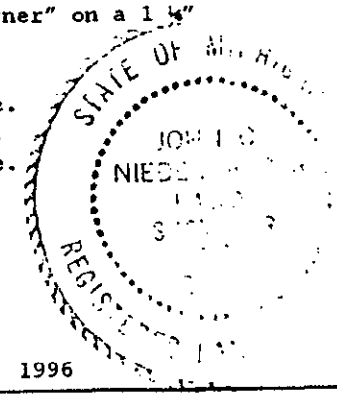

Signed by *John C. Niederhauser*
 Surveyor's Michigan License No. 24608

Date May 30, 1996

002-200