

VAN BUREN COUNTY REMONUMENTATION PROGRAM

LAND CORNER RECORDATION CERTIFICATE  
Filing Requirement of Act 74, Mich. P.A. 1970

Oct 19 11 52 AM '93

LIBER 4 PAGE 67  
1993  
COMMISSION

For corners in Van Buren (County) Located In: Keeler Twp. Corner Code #

1. Public Land Survey	Sec. 15	T <u>4</u> S. R <u>16</u> W.	<u>G-5</u>
		T _____ R _____	_____
		T _____ R _____	_____
		T _____ R _____	_____
2. Property Controlling in Section	S _____	T _____ R _____	_____
	S _____	T _____ R _____	_____
3. Miscellaneous Property in Sec.	S _____	T _____ R _____	_____
	S _____	T _____ R _____	_____

4. Lot No. \_\_\_\_\_, Recorded Plat \_\_\_\_\_  
5. Private Claims \_\_\_\_\_

Mark A. Smith  
VAN BUREN CO  
REGISTER OF DEEDS

9.00  
10/17 0101 10SURVEY

Register of Deeds Stamp & File Number

I, John C. Hunt, P.S., in a field survey on July 28, 19 93, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

2/30/1830 Gov. Survey: EH Lytle DS: N. on sec. line 80 ch. Set post cor.: 30" Walnut N.61°W. 10 lks., 6" Beech S.79°E. 17 lks. 12/1/1870 AJ Pierce CS: No visible signs of this cor. above ground & dug 1/2 day before finding anything. Finally struck root of Walnut wit. tree, from which soon fd. old stake-OK-no doubts. Meas. N.2646.6' & set C/L road N. 959.64', meas. E. 2644.62' to 1/4 post stake & stone, meas. W. 2632.08' to 1/4 post stake & stone. Renewed stake & stone, Wit.: 6" Butternut S.31°E. 82 lks., 8" Walnut N.32°E. 62 lks. 7/29/1948 TA Smith CS: Fd. piece of brick & 2 stones, but no stake, wit.: 33' E. of T-rail cor. fence post, Twin Oak N.80°+-E. 33.3' to C/L, center of 2 twin Oaks N.30°W. 62' to C/L, meas. W. to fence 2631.3', meas. N. 2646.9', meas. S. to spike at 1/4 post 2652.9', meas. E. 2660' to C/L blk. top rd. 1952+- Spike in road, wit.: spike in NW side 36" Walnut S.45°W. 42.4', spike in cor. fence post N.45°W. 50.0', spike in S. side

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner: (Continued on back)


G-5 Section corner common to Sections 9, 10, 15, & 16, T4S-R16W, Keeler Township. Corner evidence found: Standard Marker in monument box 6' E. of C/L of C.R. 687 & 12' N. of C/L 80th Ave. to West, & dug down into mon box & found stones & brick near bottom of mon box, on July 28, 1993. No Harrison Marker set. (Corner accepted & approved as found at meeting of Peer Group of Surveyors on June 30, 1993.)

THIS GOVERNMENT MONUMENT WAS RESTORED WITH APPROVAL OF THE VAN BUREN COUNTY REMONUMENTATION PEER GROUP OF SURVEYORS AT A MEETING HELD JUNE 30, 1993, AND IS ACCEPTED AS A CAREFUL AND FAITHFUL PERPETUATION OF THE POSITION OF THE ORIGINAL CORNER.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

G-5 STANDARD MARKER IN MONUMENT BOX

- + 6' W. & + 15' S., fd. Boat Spike.
- N.80°E. 27.87' Nail & tag in SE face of pole.
- S.70°E. 70.95' SW cor. bldg. owned by Wm. Foster.
- S.75°W. 68.54' Nail & tag in Northerly face of pole.
- N.75°W. 46.90' C/L tel. cable box #79998.

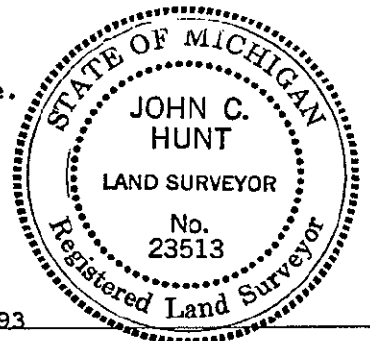

Signed by John C. Hunt, P.S.  
Surveyor's Michigan License No. 23513

Date Oct. 17, 1993

LIBER 4 PAGE 68

(Continued from front)

30" Walnut N.45°E. 30.6', spike in W. side 20" Walnut S.45°E. 36.9'. 12/17/1956 Survey N. of W $\frac{1}{2}$  post 1107.8 on sec. line.

2/6/63 WQ Smith CS/Crewchief P. Coulson: 2/10/66 (same) Note shows mon box & survey 102' S. of corner. 12/1/1970 J.B. & C.L. found bronze cap in mon box.

1974 & 1977 A Howard PS/PE fd. iron in mon box. 2/4/1992 JC Hunt PS: fd. iron in mon box & rec. in L.3 p.221.